

24

Kirchhoff Plates: Field Equations

TABLE OF CONTENTS

	Page
§24.1. INTRODUCTION	24-3
§24.2. BASIC CONCEPTS	24-3
§24.2.1. Structural Function	24-3
§24.2.2. Plate Terminology	24-4
§24.2.3. Mathematical Models	24-4
§24.3. THE KIRCHHOFF PLATE	24-6
§24.3.1. Kinematic Equations	24-7
§24.3.2. Moment-Curvature Relations	24-9
§24.3.3. Transverse Shear Forces and Stresses	24-10
§24.3.4. Equilibrium Equations	24-11
§24.3.5. Indicial and Matrix Forms	24-12
§24.3.6. Skew Cuts	24-12
§24.3.7. The Strong Form Diagram	24-13
§24.4. *THE BIHARMONIC EQUATION	24-14
§24.5. BIBLIOGRAPHY	24-14
EXERCISES	24-17

§24.1. INTRODUCTION

Multifield variational principles were primarily motivated by “difficult” structural models, such as plate bending, shells and near incompressible behavior. In this Chapter we begin the study of one of those difficult problems: plate bending.

Following a review of the wide spectrum of plate models, attention is focused on the Kirchhoff model for bending of thin (but not too thin) plates. The field equations for isotropic and anisotropic plates are then discussed. The Chapter closes with an annotated bibliography.

§24.2. BASIC CONCEPTS

In the IFEM course a *plate* was defined as a three-dimensional body endowed with special geometric features. Prominent among them are

Thinness: One of the plate dimensions, called its *thickness*, is much smaller than the other two.

Flatness: The *midsurface* of the plate, which is the locus of the points that halve the thickness “fibers” or “filaments”, is a plane.

In that course we studied plates in a *plane stress* state, also called *membrane* or *lamina* state, which occurs if the external loads act on the plate midsurface as sketched in Figure 24.1(a). Under these conditions the distribution of stresses and strains across the thickness may be viewed as uniform, and the three dimensional problem can be reduced to two dimensions. If the plate displays linear elastic behavior under the range of applied loads then we have effectively reduced the problem to one of two-dimensional elasticity.

§24.2.1. Structural Function

In this Chapter we study plates subjected to *transverse loads*, that is, loads normal to its midsurface as sketched in Figure 24.1(b). As a result of such actions the plate displacements out of its plane and the distribution of stresses and strains across the thickness is no longer uniform. Finding those displacements, strains and stresses is the problem of *plate bending*.

Plate bending components occur when plates function as shelters or roadbeds: flat roofs, bridge and ship decks. Their primary function is to carry out lateral loads to the support by a combination of moment and shear forces. This process is often supported by integrating beams and plates. The beams act as stiffeners and edge members.

If the applied loads contain both loads and in-plane components, plates work simultaneously in membrane and bending. An example where that happens is in *folding plate* structures common in some industrial buildings. Those structures are composed of repeating plates that transmit roof loads to the edge beams through a combination of bending and “arch” actions; if so all plates experience both types of action. Such a combination is treated in finite element methods by *flat shell* elements. Plates designed to resist both membrane and bending actions are sometimes called *slabs*.

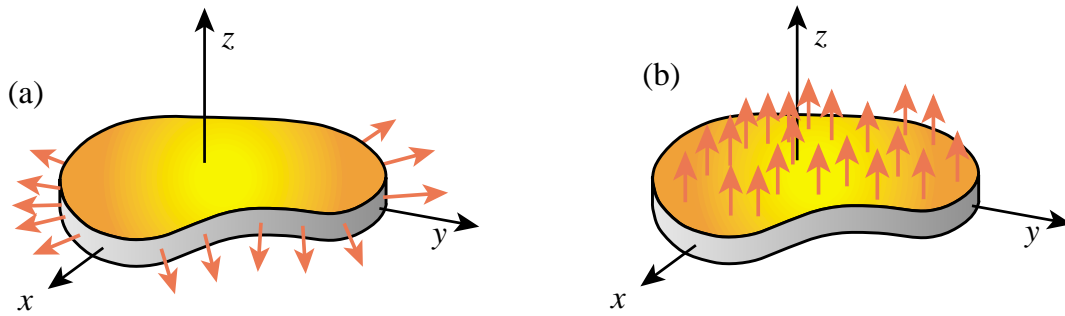


Figure 24.1. A flat plate structure in: (a) plane stress or membrane state, (b) bending state.

§24.2.2. Plate Terminology

This subsection defines a plate structure in a more precise form and introduces terminology.

Consider first a flat surface, called the plate *reference surface* or simply its *midsurface* or *midplane*. See Figure 24.2. We place the axes x and y on that surface to locate its points. The third axis, z is taken normal to the reference surface forming a right-handed Cartesian system. Axis x and y are placed in the midplane, forming a right-handed Rectangular Cartesian Coordinate (RCC) system. If the plate is shown with an horizontal midsurface, as in Figure 24.2, we shall orient z *upwards*.

Next, imagine *material normals*, also called *material filaments*, directed along the *normal* to the reference surface (that is, in the z direction) and extending $h/2$ above and $h/2$ below it. The magnitude h is the *plate thickness*. We will generally allow the thickness to be a function of x, y , that is $h = h(x, y)$, although of course most plates used in practice are of uniform thickness because of fabrication considerations. The end points of these filaments describe two bounding surfaces, called the *plate surfaces*; the one in the $+z$ direction is by convention called the top surface whereas the one in the $-z$ direction is the bottom surface.

Such a three dimensional body is called a plate if the thickness dimension h is everywhere *small*, but not too small, compared to a *characteristic length* L_c of the plate midsurface. The term “small” is to be interpreted in the engineering sense and not in the mathematical sense. For example, h/L_c is typically 1/5 to 1/100 for most plate structures. A paradox is that an extremely thin plate, such as the fabric of a parachute or a hot air balloon, ceases to function as a thin plate!

A plate is *bent* if it carries loads normal to its midsurface as shown in Figure 24.1(b). The resulting problems of structural mechanics are called:

Inextensional bending: if the plate does not experience appreciable stretching or contractions of its midsurface. Also called simply *plate bending*.

Extensional bending: if the midsurface experiences significant stretching or contraction. Also called *combined bending-stretching*, *coupled membrane-bending*, or *shell-like behavior*.

The bent plate problem is reduced to two dimensions as sketched in Figure 24.2(c). The reduction is done through a variety of mathematical models discussed next.

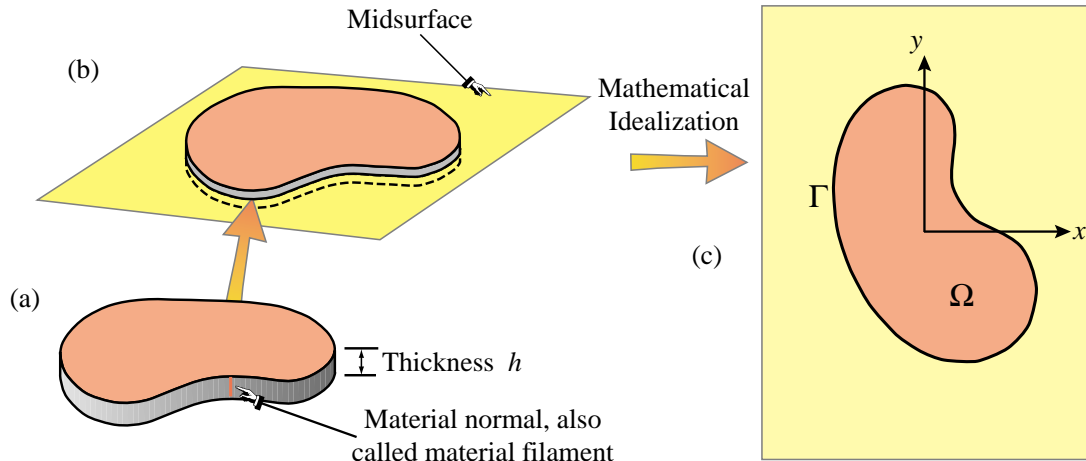


Figure 24.2. Idealization of plate as two-dimensional problem.

§24.2.3. Mathematical Models

The behavior of plates in the membrane state of Figure 24.1(a) is adequately covered by two-dimensional continuum mechanics models. On the other hand, bent plates give rise to a wider range of physical behavior because of possible coupling of membrane and bending actions. As a result, several mathematical models have been developed to cover that spectrum. The more important models are listed next.

Membrane shell model: for extremely thin plates dominated by membrane effects, such as inflatable structures and fabrics (parachutes, sails, etc).

Von-Karman model: for very thin bent plates in which membrane and bending effects interact strongly on account of finite lateral deflections.¹ Important model for post-buckling analysis.

Kirchhoff model: for thin bent plates with small deflections, negligible shear energy and uncoupled membrane-bending action.²

Reissner-Mindlin model: for thin and moderately thick bent plates in which first-order transverse shear effects are considered.³ Particularly important in dynamics as well as honeycomb and composite wall constructions.

High order composite models: for detailed (local) analysis of layered composites including inter-

¹ Th. v. Kármán, Festigkeitsprobleme im Maschinenbau., *Encyklopädie der Mathematischen Wissenschaften*, **4/4**, 311–385, 1910.

² G. Kirchhoff, Über das Gleichgewicht und die Bewegung einer elastischen Scheibe, *Crelles J.*, **40**, 51–88, 1850. Also his Vorlesungen über Mathematischen Physik, *Mechanik*, 1877., translated to French by Clebsch.

³ E. Reissner, The effect of transverse shear deformation on the bending of elastic plates, *J. Appl. Mech.*, **12**, 69–77, 1945; also E. Reissner, On bending of elastic plates, *Quart. Appl. Math.*, **5**, 55–68, 1947. Mindlin's version, intended for dynamics, was published in R. D. Mindlin, Influence of rotary inertia and shear on flexural vibrations of isotropic, elastic plates, *J. Appl. Mech.*, **18**, 31–38, 1951. Timoshenko and Woinowsky-Krieger, cited in §24.5, follow A. E. Green, On Reissner's theory of bending of elastic plates, *Quart. Appl. Math.*, **7**, 223–228, 1949.

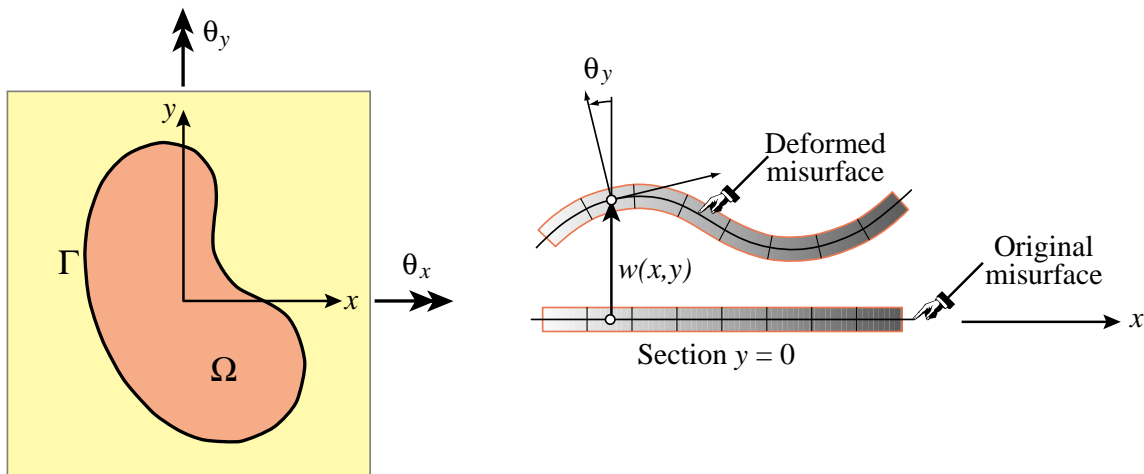


Figure 24.3. Kinematics of a Kirchhoff plate. Lateral deflection w greatly exaggerated for visibility. In practice $w \ll h$ for the Kirchhoff model to be valid.

lamina shear effects.⁴

Exact models: for the analysis of additional effects using three dimensional elasticity.⁵

The first two models are *geometrically nonlinear* and thus fall outside the scope of this course. The last four models are *geometrically linear* in the sense that *all governing equations are set up in the reference or initially-flat configuration*. The last two models are primarily used in detailed or local stress analysis near edges, point loads or openings.

All models may incorporate other types of nonlinearities due, for example, to material behavior, composite fracture, cracking or delamination, as well as certain forms of boundary conditions. In this course, however, we shall look only at the linear versions. Furthermore, we shall focus attention only on the Kirchhoff and Reissner-Mindlin plate models because these are the most commonly global used in statics and vibrations, respectively.

§24.3. THE KIRCHHOFF PLATE

Historically the first model of thin plate bending was developed by Lagrange, Poisson and Kirchhoff. It is known as the Kirchhoff plate model, or simply *Kirchhoff plate*, in honor of the German scientist who “closed” the mathematical formulation through the variational treatment of boundary conditions. In the finite element literature Kirchhoff plate elements are often called C^1 plate elements because that is the continuity order nominally required for the transverse displacement shape functions.

The Kirchhoff model is applicable to elastic plates that satisfy the following conditions.

⁴ See for example the book by J. N. Reddy cited in §24.5.

⁵ The book of Timoshenko and Woinowsky-Krieger cited in §24.5 contains a brief treatment of the exact analysis in Chapter 4.

- The plate is *thin* in the sense that the thickness h is small compared to the characteristic length(s), but not so thin that the lateral deflection w become comparable to h .
- The plate thickness is either uniform or varies slowly so that three-dimensional stress effects are ignored.
- The plate is symmetric in fabrication about the midsurface.
- Applied transverse loads are distributed over plate surface areas of dimension h or greater.⁶
- The support conditions are such that no significant extension of the midsurface develops.

We now describe the field equations for the Kirchhoff plate.

§24.3.1. Kinematic Equations

The kinematics of a Bernoulli-Euler beam is based on the assumption that *plane sections remain plane and normal to the deformed longitudinal axis*. The kinematics of the Kirchhoff plate is based on the extension of this assumption to *biaxial bending*:

“Material normals to the original reference surface remain straight and normal to the deformed reference surface.”

This assumption is illustrated in Figure 24.3. Upon bending, particles that were on the midsurface $z = 0$ undergo a deflection $w(x, y)$ along z . The slopes of the midsurface in the x and y directions are $\partial w/\partial x$ and $\partial w/\partial y$. The *rotations* of the material normal about x and y are denoted by θ_x and θ_y , respectively. These are positive as per the usual rule; see Figure 24.3. For small deflections and rotations the foregoing kinematic assumption relates these rotations to the slopes:

$$\theta_x = \frac{\partial w}{\partial y}, \quad \theta_y = -\frac{\partial w}{\partial x}. \quad (24.1)$$

The displacements $\{u_x, u_y, u_z\}$ of a plate particle $P(x, y, z)$ not necessarily located on the midsurface are given by

$$u_x = -z \frac{\partial w}{\partial x} = z\theta_y, \quad u_y = -z \frac{\partial w}{\partial y} = -z\theta_x, \quad u_z = w. \quad (24.2)$$

⁶ The Kirchhoff model can accept point or line loads and still give reasonably good deflection and bending stress predictions for homogeneous wall constructions. A detailed stress analysis is generally required, however, near the point of application of the loads using more refined models.

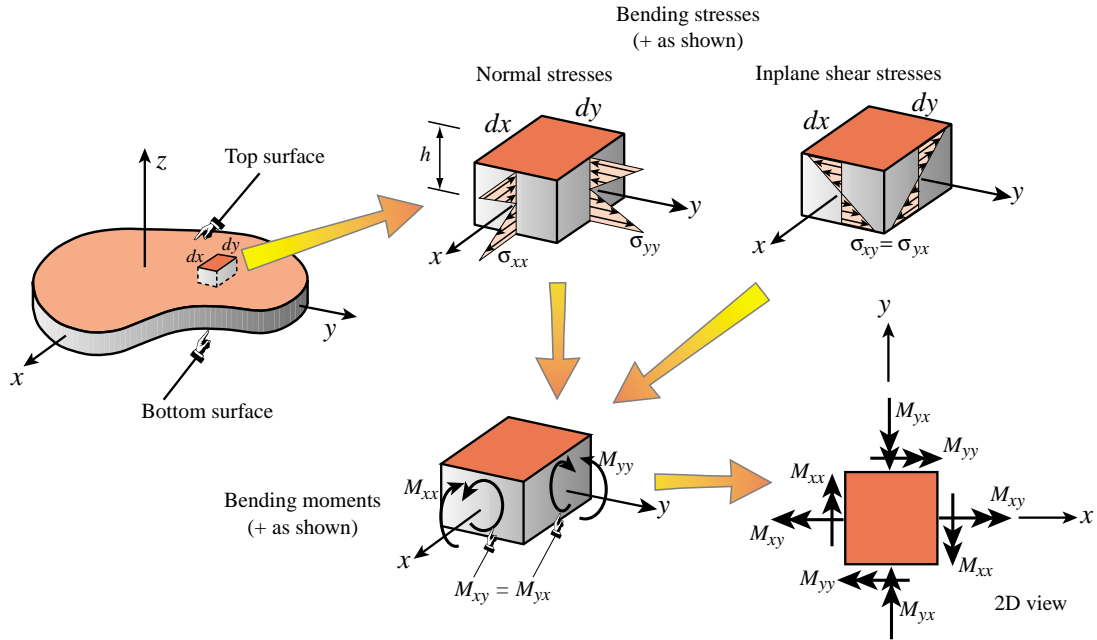


Figure 24.4. Bending stresses and moments in a Kirchhoff plate.

The strains associated with these displacements are obtained from the elasticity equations:

$$\begin{aligned}
 e_{xx} &= \frac{\partial u_x}{\partial x} = -z \frac{\partial^2 w}{\partial x^2} = -z \kappa_{xx}, \\
 e_{yy} &= \frac{\partial u_y}{\partial y} = -z \frac{\partial^2 w}{\partial y^2} = -z \kappa_{yy}, \\
 e_{zz} &= \frac{\partial u_z}{\partial z} = -z \frac{\partial^2 w}{\partial z^2} = 0, \\
 2e_{xy} &= \frac{\partial u_x}{\partial y} + \frac{\partial u_y}{\partial x} = -2z \frac{\partial^2 w}{\partial x \partial y} = -2z \kappa_{xy}, \\
 2e_{xz} &= \frac{\partial u_x}{\partial z} + \frac{\partial u_z}{\partial x} = -\frac{\partial w}{\partial x} + \frac{\partial w}{\partial x} = 0, \\
 2e_{yz} &= \frac{\partial u_y}{\partial z} + \frac{\partial u_z}{\partial y} = -\frac{\partial w}{\partial y} + \frac{\partial w}{\partial y} = 0.
 \end{aligned}
 \tag{24.3}$$

Here

$$\kappa_{xx} = \frac{\partial^2 w}{\partial x^2}, \quad \kappa_{yy} = \frac{\partial^2 w}{\partial y^2}, \quad \kappa_{xy} = \frac{\partial^2 w}{\partial x \partial y}.
 \tag{24.4}$$

are the *curvatures* of the deflected midsurface. It is seen that the entire displacement and strain field are fully determined if $w(x, y)$ is given.

REMARK 24.1

Many entry-level textbooks on plates introduce the foregoing relations gently through geometric arguments, because students may not be familiar with 3D elasticity theory. The geometric approach has the advantage

that the kinematic limitations of the plate bending model are more easily visualized. On the other hand the direct approach followed here is more compact.

REMARK 24.2

Some inconsistencies of the Kirchhoff model emerge on studying (24.3). For example, the transverse shear strains are zero. If the plate is isotropic and follows Hooke's law, this implies $\sigma_{xz} = \sigma_{yz} = 0$ and consequently there are no transverse shear forces. But these forces appear necessarily from the equilibrium equations as discussed in §24.3.4.

Similarly, $e_{zz} = 0$ says that the plate is in plane strain whereas plane stress: $\sigma_{zz} = 0$, is a closer approximation to the physics. For a homogeneous isotropic plate, plane strain and plane stress coalesce if and only if Poisson's ratio is zero. Both inconsistencies are similar to those encountered in the Bernoulli-Euler beam model.

§24.3.2. Moment-Curvature Relations

The nonzero bending strains e_{xx} , e_{yy} and e_{xy} produce bending stresses σ_{xx} , σ_{yy} and σ_{xy} as depicted in Figure 24.4. The stress σ_{xy} is sometimes referred to as the in-plane shear stress or the bending shear stress, to distinguish it from the transverse shear stresses σ_{xz} and σ_{yz} studied later.

To establish the plate constitutive equations in moment-curvature form, it is necessary to make several assumptions as to plate material and fabrication. We shall assume:

- The plate is *homogeneous*, that is, fabricated of the same material through the thickness.
- Each plate lamina $z = \text{constant}$ is in plane stress.
- The plate material obeys Hooke's law for plane stress, which in matrix form is

$$\begin{bmatrix} \sigma_{xx} \\ \sigma_{yy} \\ \sigma_{xy} \end{bmatrix} = \begin{bmatrix} E_{11} & E_{12} & E_{13} \\ E_{12} & E_{22} & E_{23} \\ E_{13} & E_{23} & E_{33} \end{bmatrix} \begin{bmatrix} e_{xx} \\ e_{yy} \\ 2e_{xy} \end{bmatrix} = -z \begin{bmatrix} E_{11} & E_{12} & E_{13} \\ E_{12} & E_{22} & E_{23} \\ E_{13} & E_{23} & E_{33} \end{bmatrix} \begin{bmatrix} \kappa_{xx} \\ \kappa_{yy} \\ 2\kappa_{xy} \end{bmatrix}. \quad (24.5)$$

The bending moments M_{xx} , M_{yy} and M_{xy} are stress resultants with dimension of moment per unit length, that is, force. The positive sign conventions are shown in Figure 24.4. The moments are calculated by integrating the elementary stress couples through the thickness:

$$\begin{aligned} M_{xx} dy &= \int_{-h/2}^{h/2} -\sigma_{xx} z dy dz, & M_{xx} &= - \int_{-h/2}^{h/2} \sigma_{xx} z dz, \\ M_{yy} dx &= \int_{-h/2}^{h/2} -\sigma_{yy} z dx dz, & M_{yy} &= - \int_{-h/2}^{h/2} \sigma_{yy} z dz, \\ M_{xy} dy &= \int_{-h/2}^{h/2} -\sigma_{xy} z dy dz, & M_{xy} &= - \int_{-h/2}^{h/2} \sigma_{xy} z dz, \\ M_{yx} dx &= \int_{-h/2}^{h/2} -\sigma_{yx} z dx dz, & M_{yx} &= - \int_{-h/2}^{h/2} \sigma_{yx} z dz. \end{aligned} \quad (24.6)$$

It will be shown later that rotational moment equilibrium implies $M_{xy} = M_{yx}$. Consequently only M_{xx} , M_{yy} and M_{xy} need to be calculated. Inserting (24.5) into (24.6) and integrating, one obtains

the moment-curvature relation

$$\begin{bmatrix} M_{xx} \\ M_{yy} \\ M_{xy} \end{bmatrix} = \frac{h^3}{12} \begin{bmatrix} E_{11} & E_{12} & E_{13} \\ E_{12} & E_{22} & E_{23} \\ E_{13} & E_{23} & E_{33} \end{bmatrix} \begin{bmatrix} \kappa_{xx} \\ \kappa_{yy} \\ 2\kappa_{xy} \end{bmatrix} = \begin{bmatrix} D_{11} & D_{12} & D_{13} \\ D_{12} & D_{22} & D_{23} \\ D_{13} & D_{23} & D_{33} \end{bmatrix} \begin{bmatrix} \kappa_{xx} \\ \kappa_{yy} \\ 2\kappa_{xy} \end{bmatrix}. \quad (24.7)$$

The $D_{ij} = E_{ij}h^3/12$ for $i, j = 1, 2, 3$ are called the *plate rigidity coefficients*. They have dimension of force \times length. For an isotropic material of elastic modulus E and Poisson's ratio ν , (24.7) specializes to

$$\begin{bmatrix} M_{xx} \\ M_{yy} \\ M_{xy} \end{bmatrix} = D \begin{bmatrix} 1 & \nu & 0 \\ \nu & 1 & 0 \\ 0 & 0 & \frac{1}{2}(1 + \nu) \end{bmatrix} \begin{bmatrix} \kappa_{xx} \\ \kappa_{yy} \\ 2\kappa_{xy} \end{bmatrix}. \quad (24.8)$$

Here $D = \frac{1}{12}Eh^3/(1 - \nu^2)$ is called the *isotropic plate rigidity*.

If the bending moments M_{xx} , M_{yy} and M_{xy} are given, the maximum values of the corresponding in-plane stress components can be recovered from

$$\sigma_{xx}^{max,min} = \pm \frac{6M_{xx}}{h^2}, \quad \sigma_{yy}^{max,min} = \pm \frac{6M_{yy}}{h^2}, \quad \sigma_{xy}^{max,min} = \pm \frac{6M_{xy}}{h^2} = \sigma_{yx}^{max,min}. \quad (24.9)$$

These max/min values occur on the plate surfaces as illustrated in Figure 24.4. Formulas (24.9) are useful for stress design.

REMARK 24.3

For non-homogeneous plates, which are fabricated with different materials, the essential steps are the same but the integration over the plate thickness may be significantly more laborious. (For common structures such as reinforced concrete slabs or laminated composites, the integration process is explained in specialized books.) If the plate fabrication is symmetric about the midsurface, inextensional bending is possible, and the end result is a moment-curvature relation such as (24.8). If the wall fabrication is not symmetric, however, coupling occurs between membrane and bending effects even if the plate is only laterally loaded. The Kirchhoff and the plane stress model need to be linked to account for those effects. This coupling is examined further in chapters dealing with shell models.

§24.3.3. Transverse Shear Forces and Stresses

The equilibrium equations derived in §24.3.4 require the presence of transverse shear forces. The components of these forces in the $\{x, y\}$ system are called Q_x and Q_y . These are defined as shown in Figure 24.5. These are *forces per unit of length*, with physical dimensions such as N/cm or kips/in.

Associated with these shear forces are transverse shear stresses σ_{xz} and σ_{yz} . For a homogeneous plate and using an equilibrium argument similar to Euler-Bernoulli beams, the stresses may be shown to vary parabolically over the thickness, as illustrated in Figure 24.5:

$$\sigma_{xz} = \sigma_{xz}^{max} \left(1 - \frac{4z^2}{h^2}\right), \quad \sigma_{yz} = \sigma_{yz}^{max} \left(1 - \frac{4z^2}{h^2}\right). \quad (24.10)$$

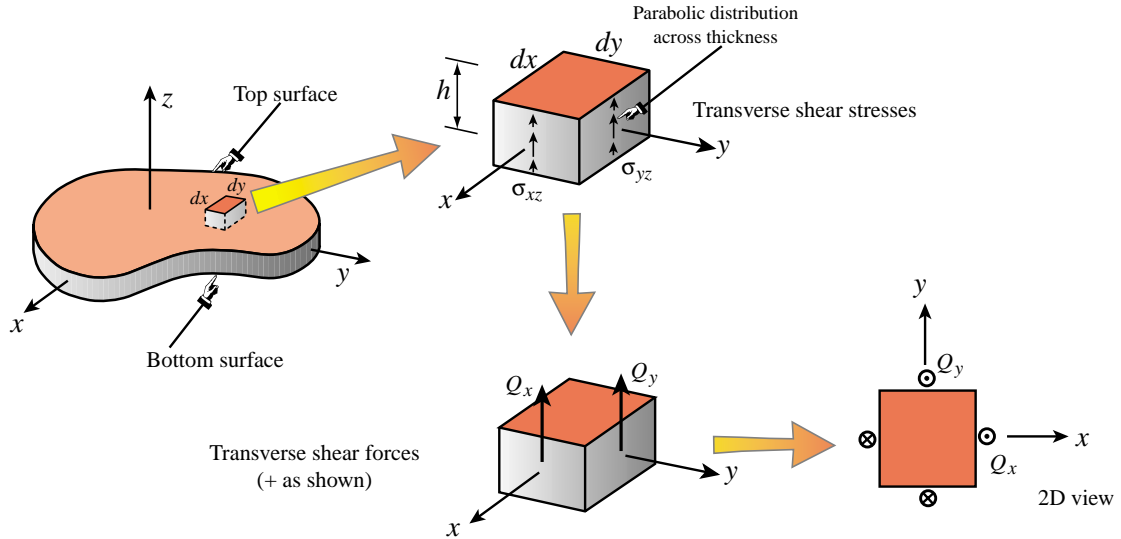


Figure 24.5. Transverse shear forces and stresses in a Kirchhoff plate.

in which the peak values σ_{xz}^{max} and σ_{yz}^{max} , which occur on the midsurface $z = 0$, are only function of x and y . Integrating over the thickness gives

$$Q_x = \int_{-h/2}^{h/2} \sigma_{xz} dz = \frac{2}{3} \sigma_{xz}^{max} h, \quad Q_y = \int_{-h/2}^{h/2} \sigma_{yz} dz = \frac{2}{3} \sigma_{yz}^{max} h, \quad (24.11)$$

If Q_x and Q_y are given,

$$\sigma_{xz}^{max} = \frac{3}{2} \frac{Q_x}{h}, \quad \sigma_{yz}^{max} = \frac{3}{2} \frac{Q_y}{h}. \quad (24.12)$$

As in the case of Bernoulli-Euler beams, predictions such as (24.12) must come entirely from equilibrium analysis. The Kirchhoff plate model ignores the transverse shear energy, and in fact predicts $\sigma_{xz} = \sigma_{yz} = 0$ from the kinematic equations (24.3). Cf. Remark 24.2. In practical terms this means that stresses (24.12) should be significantly smaller than (24.9). If they are not, the Kirchhoff model does not apply.

§24.3.4. Equilibrium Equations

To derive the interior equilibrium equations we consider differential midsurface elements $dx \times dy$ aligned with the $\{x, y\}$ axes as illustrated in Figure 24.6. Consideration of force equilibrium along the z direction in Figure 24.6(a) yields the shear equilibrium equation

$$\frac{\partial Q_x}{\partial x} + \frac{\partial Q_y}{\partial y} = -q. \quad (24.13)$$

where q is the applied lateral force per unit of area. Force equilibrium along the x and y axes is automatically satisfied and does not give additional equilibrium equations.

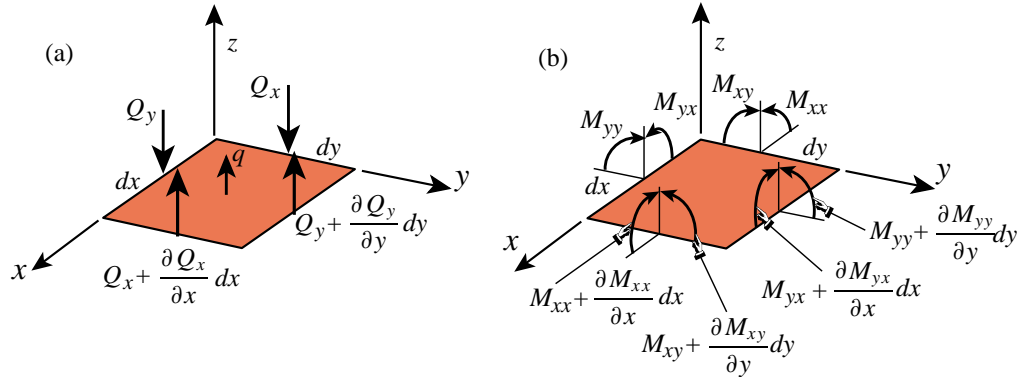


Figure 24.6. Differential midsurface elements used to derive the equilibrium equations of a Kirchhoff plate.

Consideration of moment equilibrium about y and x in Figure 24.6(b) yields two moment differential equations:

$$\boxed{\frac{\partial M_{xx}}{\partial x} + \frac{\partial M_{xy}}{\partial y} = -Q_x, \quad \frac{\partial M_{yx}}{\partial x} + \frac{\partial M_{yy}}{\partial y} = -Q_y.} \quad (24.14)$$

Moment equilibrium about z gives⁷

$$\boxed{M_{xy} = M_{yx}.} \quad (24.15)$$

The four equilibrium equations (24.13)–(24.15) relate six fields: M_{xx} , M_{xy} , M_{yx} , M_{yy} , Q_x and Q_y . Hence plate problems are statically indeterminate.

Eliminating Q_x and Q_y from (24.13) and (24.14), and setting $M_{yx} = M_{xy}$, gives the following moment equilibrium equation in terms of the load:

$$\boxed{\frac{\partial^2 M_{xx}}{\partial x^2} + 2 \frac{\partial^2 M_{xy}}{\partial x \partial y} + \frac{\partial^2 M_{yy}}{\partial y^2} = q.} \quad (24.16)$$

For cylindrical bending in the x direction we recover the Bernoulli-Euler beam equilibrium equation $M'' = q$, where $M \equiv M_{xx}$ and q are understood as given per unit of y width.

§24.3.5. Indicial and Matrix Forms

The foregoing field equations have been given in full Cartesian form. To facilitate reading the existing literature and the working out the finite element formulation, the matrix and indicial forms are displayed in Table 24.1.

⁷ Timoshenko's book (cited in §24.5) unfortunately defines M_{yx} so that $M_{xy} = -M_{yx}$. The present convention is far more common in recent books and agrees with the shear reciprocity $\sigma_{xy} = \sigma_{yx}$ of elasticity theory.

Table 24.1 Kirchhoff Plate Field Equations in Matrix and Indicial Form

<i>Field eqn</i>	<i>Matrix form</i>	<i>Indicial form</i>	<i>Equation name for plate problem</i>
KE	$\boldsymbol{\kappa} = \mathbf{P} w$	$\kappa_{\alpha\beta} = w_{,\alpha\beta}$	Kinematic equation
CE	$\mathbf{M} = \mathbf{D} \boldsymbol{\kappa}$	$M_{\alpha\beta} = D_{\alpha\beta\gamma\delta} \kappa_{\gamma\delta}$	Moment-curvature equation
BE	$\mathbf{P}^T \mathbf{M} = q$	$M_{\alpha\beta,\alpha\beta} = q$	Internal equilibrium equation

Here $\mathbf{P}^T = [\partial^2/\partial x^2 \quad \partial^2/\partial y^2 \quad 2\partial^2/\partial x\partial y] = [\partial^2/\partial x_1\partial x_1 \quad \partial^2/\partial x_2\partial x_2 \quad 2\partial^2/\partial x_1\partial x_2]$,
 $\mathbf{M}^T = [M_{xx} \quad M_{yy} \quad M_{xy}] = [M_{11} \quad M_{22} \quad M_{12}]$,
 $\boldsymbol{\kappa}^T = [\kappa_{xx} \quad \kappa_{yy} \quad 2\kappa_{xy}] = [\kappa_{11} \quad \kappa_{22} \quad 2\kappa_{12}]$.
 Greek indices, such as α , run over 1,2 only.

§24.3.6. Skew Cuts

The preceding relations were obtained by assuming that differential elements were aligned with x and y . Consider now the case of stress resultants acting on a plane section *skewed* with respect to the x and y axes. This is illustrated in Figure 24.7, which defines notation and sign conventions. The exterior normal \mathbf{n} to this cut forms an angle ϕ with x , positive counterclockwise about z . The tangential direction \mathbf{s} forms an angle $90^\circ + \phi$ with x .

The bending moments and transverse shear forces defined in Figure 24.7 are related to the Cartesian components by

$$\begin{aligned} Q_n &= Q_x c_\phi + Q_y s_\phi, \\ M_{nn} &= M_{xx} c_\phi^2 + M_{yy} s_\phi^2 + 2M_{xy} s_\phi c_\phi, \\ M_{ns} &= (M_{yy} - M_{xx})s_\phi c_\phi + M_{xy} (c_\phi^2 - s_\phi^2), \end{aligned} \quad (24.17)$$

in which $c_\phi = \cos \phi$ and $s_\phi = \sin \phi$.

These relations can be obtained directly by considering the equilibrium of the midsurface triangles shown in the bottom of Figure 24.7. Alternatively they can be derived by transforming the wall stresses σ_{xx} , σ_{xy} , σ_{xz} and σ_{yz} to an oblique cut, and then integrating through the thickness.

§24.3.7. The Strong Form Diagram

Figure 24.8 shows the Strong Form diagram for the field equations of the Kirchhoff plate.

The boundary conditions are omitted since those are treated in the next Chapter.

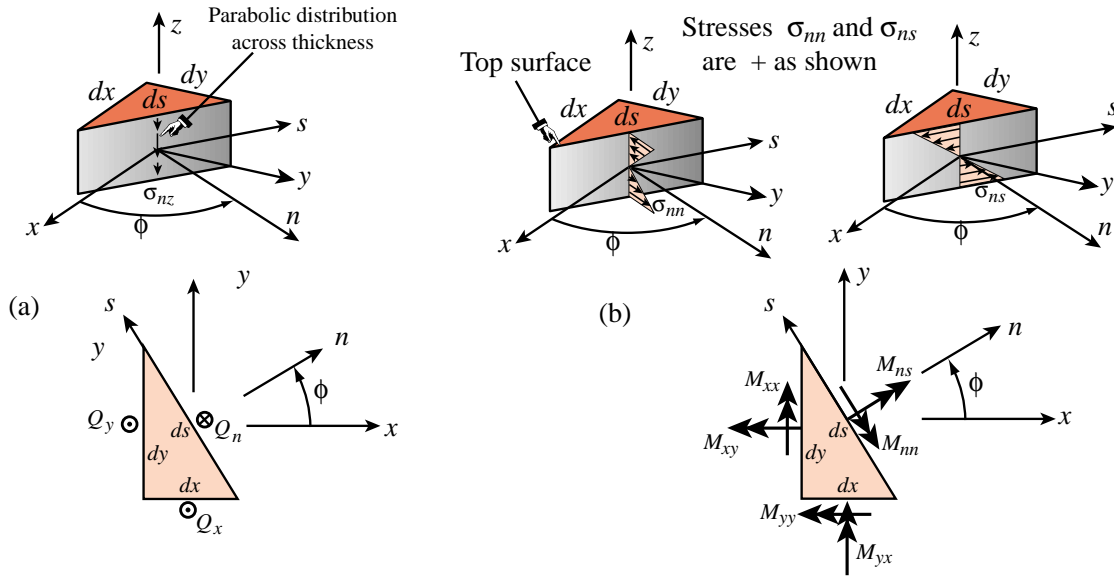


Figure 24.7. Skew plane sections in Kirchhoff plate.

§24.4. *THE BIHARMONIC EQUATION

Consider a *homogeneous isotropic* plate of *constant rigidity* D . Elimination of the bending moments and curvatures from the field equations yields the famous equation for thin plates, first derived by Lagrange⁸

$$D\nabla^4 w = D\nabla^2 \nabla^2 w = q, \tag{24.18}$$

in which

$$\nabla^4 \equiv \frac{\partial^4}{\partial x^4} + 2\frac{\partial^4}{\partial x^2 \partial y^2} + \frac{\partial^4}{\partial y^4}, \tag{24.19}$$

is the biharmonic operator. Thus, under the foregoing constitutive and fabrication assumptions the plate deflection $w(x, y)$ satisfies a non-homogeneous biharmonic equation. If the lateral load q vanishes, as happens with plates loaded only on their boundaries, the deflection w satisfies the homogeneous biharmonic equation.

The biharmonic equation is the analog of the Bernoulli-Euler beam equation for uniform bending rigidity EI : $EIw^{IV} = q$, where $w^{IV} = d^4w/dx^4$. Equation (24.18) was the basis of much of the early work in plates, both analytical and numerical (the latter by either finite difference or Galerkin methods). After the advent of finite elements it is largely a mathematical curiosity.

§24.5. BIBLIOGRAPHY

There is not shortage of material on plates. The problem is one of selection. Some of the best known English textbooks and monographs are listed below. Only books examined by the writer are commented upon. Others are simply listed. Emphasis is on technology oriented books of interest to engineers.

S. Ambartsumyan, *Theory of Anisotropic Plates: Strength, Stability, and Vibrations*, Hemisphere Pubs. Corp., 1991

⁸ Never published; found posthumously in his Notes (1813).

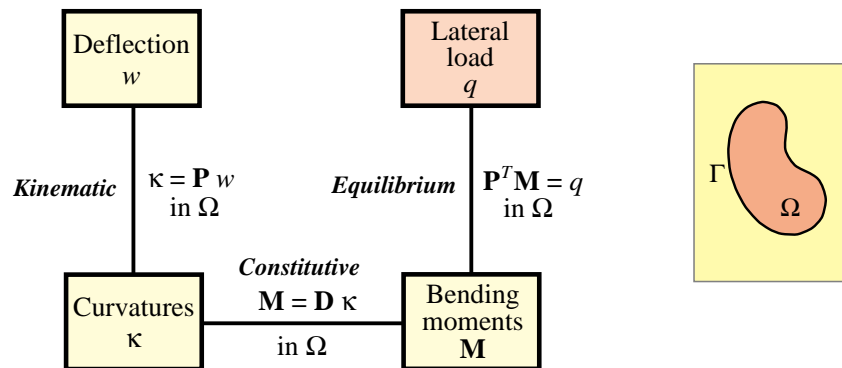


Figure 24.8. Strong Form diagram of the field equations of the Kirchhoff plate. Boundary condition links omitted.

C. R. Calladine, *Engineering Plasticity*, Pergamon Press, 1969. A textbook containing a brief treatment of plastic behavior of homogeneous (metal) plates. Many exercises, well written.

L. H. Donnell, *Beams, Plates and Shells*, McGraw-Hill, 1976. Unlike Timoshenko, largely obsolete.

D. J. Gorman, *Vibration Analysis of Plates by the Superposition Method*, World Scientific Pub. Co, 1999

R. Hussein, *Composite Panels and Plates: Analysis and Design*, Technomic, Lancaster, PA, 1986.

S. G. Letnitskii, *Theory of Elasticity of an Anisotropic Elastic Body*, Holden-Day, 1963. Translated from Russian. See comments for next one.

S. G. Letnitskii, *Anisotropic Plates*, Gordon and Breach, 1968. Translated from Russian. One of the earliest monographs devoted to the title subject. Focus is on analytical solutions of tractable problems of anisotropic plates.⁹

K. M. Liew et al. (eds.), *Vibration of Mindlin Plates: Programming the P-Version Ritz Method*, Elsevier Science Ltd, 1998.

F. F. Ling (ed.), *Vibrations of Elastic Plates : Linear and Nonlinear Dynamical Modeling of Sandwiches, Laminated Composites, and Piezoelectric Layers*, Springer-Verlag, New York, 1995.

A. E. H. Love, *Theory of Elasticity*, Cambridge, 4th ed 1927, still reprinted as a Dover book. A classical (late XIX century) treatment of elasticity by a renowned applied mathematician contains several sections on thin plates. Material and notation is outdated. Don't expect any physical insight; Love has no interest in engineering applications. Useful for tracing historical references to specific problems.

P. G. Lowe, *Basic Principles of Plate Theory*, Surrey Univ. Press, Blackie Group, London, 1982. An elementary treatment of plate mechanics that covers a lot of ground, including plastic and optimal design, in 175 pages. Appropriate for supplementary reading in a senior level course.

L. S. D. Morley, *Skew Plates and Structures*, Pergamon Press, 1963. This tiny monograph was motivated by the increasing importance of skew shapes in high speed aircraft after WWII. Compact and well written, still worth consulting for benchmarks.

J. N. Reddy, *Mechanics of Laminated Composite Plates*, CRC Press, Boca Raton, FL, 1997. Good coverage of methods for composite wall constructions.

⁹ The advent of finite elements has made the distinction between isotropic and anisotropic plates unimportant from a computational viewpoint.

W. Soedel, *Vibrations of Plates and Shells*, Marcel Dekker, 1993.

R. Szilard, *Theory and Analysis of Plates*, Prentice-Hall, 1974. A massive work (710 pages) similar in level to Timoshenko's but covering more ground: numerical methods, dynamics, vibration and stability analysis. Although intended as a graduate textbook it contains no exercises, which detracts from its usefulness. The treatment of numerical methods is obsolete, with many pages devoted to finite difference methods in vogue before 1960.

S. P. Timoshenko and S. Woinowsky-Krieger, *Theory of Plates and Shells*, McGraw-Hill, New York, 2nd edition, 1959. A classical reference book. Not a textbook (it lacks exercises) but case-by-case driven. It is quintessential Timoshenko: a minimum of generalities and lots of examples. The title is a bit misleading: only shells of special geometries are dealt with, in 3 chapters out of 16. As for plates, the emphasis is on linear static problems using the Kirchhoff model. There are only two chapters treating moderately large deflections, one with the von Karman model. There is no treatment of buckling or vibration, which are covered in other Timoshenko books.¹⁰ The reader will find no composite walls, only one chapter on orthotropic plates (called "anisotropic" in the book) and a brief description of the Reissner-Mindlin model, which had appeared in between the 1st and 2nd editions. Despite these shortcomings it is still *the* reference book to have for solution of specific plate problems. The physical insight is unmatched. Old-fashioned full notation is used (no matrices, vectors or tensors). Strangely, this long-windedness fits nicely with the deliberate pace of engineering before computers, where understanding of the physics was more important than numbers. The vast compendium of solutions comes handy when checking FEM codes, and for preliminary design work. Exhaustive reference source for all work before 1959.

J. K. Whitney, *Structural Analysis of Laminated Anisotropic Plates*, Technomic Pubs Co, Lancaster, PA, 1987. Expanded version of an 1970 book by Ashton and Whitney. Concentrates on layered composite and sandwich wall constructions of interest in aircraft structures.

R. H. Wood, *Plastic Analysis of Slabs and Plates*, Thames and Hudson, 1961. Focuses on plastic analysis of reinforced concrete plates by yield line methods. Long portions are devoted to the author's research and supporting experimental work. Oriented to civil engineers.

The well known handbook by Roark contains chapters collecting specific solutions of plate statics and vibration.

For general books on composite materials and their use in aerospace, civil, marine, and mechanical engineering, a web search on new and used titles is recommended.

¹⁰ In the companion volumes *Vibrations of Engineering Structures* and *Theory of Elastic Stability*.

Homework Exercises for Chapter 24**Kirchhoff Plates: Field Equations****EXERCISE 24.1**

[A:15] The biharmonic operator (24.19) can be written symbolically as $\nabla^4 = \mathbf{P}^T \mathbf{W} \mathbf{P}$, where \mathbf{W} is a diagonal weighting matrix and \mathbf{P} is defined in Table 24.1. Find \mathbf{W} .

EXERCISE 24.2

[A:15] Using the matrix form of the Kirchhoff plate equations given in Table 24.1, eliminate the intermediate variables $\boldsymbol{\kappa}$ and \mathbf{M} to show that the generalized form of the biharmonic plate equation (24.18) is $\mathbf{P}^T \mathbf{D} \mathbf{P} w = q$. This form is valid for anisotropic plates of variable thickness.

EXERCISE 24.3

[A:15] Rewrite $\mathbf{P}^T \mathbf{D} \mathbf{P} w = q$ in indicial notation, assuming that \mathbf{D} is constant over the plate.

EXERCISE 24.4

[A:20] Rewrite $\mathbf{P}^T \mathbf{D} \mathbf{P} w = q$ in glorious full form in Cartesian coordinates, assuming that \mathbf{D} is constant over the plate.

EXERCISE 24.5

[A:20] Express the rotations θ_n and θ_s about the normal and tangential directions, respectively, in terms of θ_x , θ_y and the angle ϕ defined in Figure 24.7.